

# Compact Ultra Low Temperature Chamber

MC - 711 • 811



# Capable of ultra low temperatures as low as - 85 with our unique instrumentation for program or constant operation.

The Compact Ultra Low Temperature Chamber embodies the high performance, reliability, and durability of a full-size chamber.

The line-up is comprised of a total of four models.

Select either the P-instrumentation for programming temperature cycling or the T-instrumentation for constant operation.

Also choose from two very wide temperature ranges that use environmentally-friendly HFC refrigerants.

Select the best model for your specific application and test objectives.



# Utility



Programming operation type



Constant operation type



Chamber interior



Paperless recorder (optional) \*Sample photo

- **Four models available with a choice from two temperature ranges and two types of instrumentation**

The MC-series comes in two temperature ranges of - 75 to + 100 °C / - 85 to + 180 °C, and two types of instrumentation for constant or program operation. A wide temperature range supports tests from temperature characteristic tests to low temperature preservation tests.

- **P- and T-instrumentation to meet your test objectives**

P-instrumentation with 6.5-inch TFT color LCD enable easy test setting simply by following the displayed instructions. It offers 10 built-in standard programs, and can store up to 20 program patterns (99 steps per pattern), thus capable of diverse program tests. A wide variety of functions such as trend graph display of operation history, timer, and help support are provided for improved operational ease. T-instrumentation with large 7-segment LED offers constant operation.

- **Accurate PID temperature control**

Just by setting the test temperature, PID control automatically controls temperature, with high accuracy.

- **Ozone-friendly HFC refrigerant**

The refrigerator is loaded with R404A/ R508A HFC refrigerant which is zero ozone depletion potential to protect the global environment.

- **Paperless Recording (optional)**

The paperless recorder makes it easy record the temperatures of different components, such as the chamber temperature, on a memory card (Compact Flash).


# User-friendly

## ● Network System E-PILOT 21 (Optional)

E-PILOT 21 is ESPEC's suite of networking tools for communicating between a computer and our environmental testing chambers. It enables the management of chamber operation and test settings from a remote location. Additionally, measurement data and system status can be constantly monitored and recorded on the computer.

## ● Safety measures

Enough precautions are taken to ensure the safety of operators, specimens and the chamber, with various safety measures such as the leakage breaker and control circuit overload & short circuit protection fuse. In case these safety devices activate, power is shut down to halt chamber operation and details of alarm is displayed on the screen.

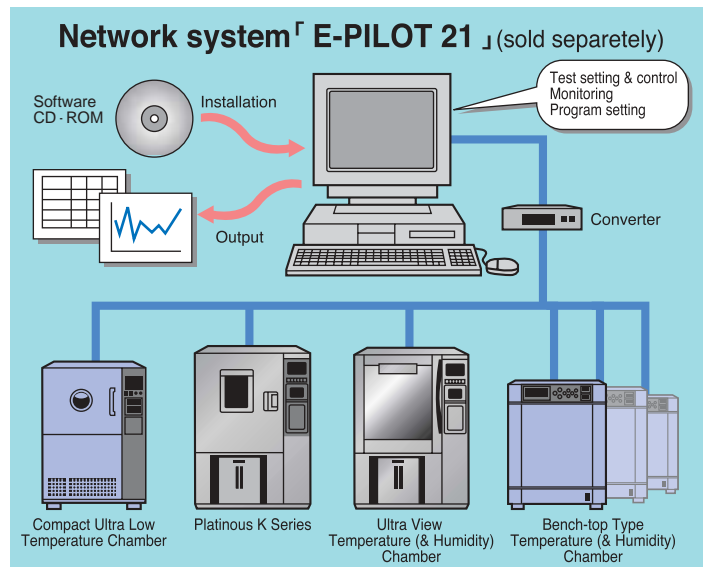

### ■ SAFETY DEVICES

- Leakage breaker for power supply (for 200/220V AC only)
- Circuit breaker (for 380V AC only)
- Air circulator temperature switch
- Electric parts compartment door switch
- Control circuit overload & short circuit protection fuse
- Reverse prevention relay
- Refrigerator overload relay
- SSR overload & short circuit protecting circuit breaker
- Thermal fuse
- Specimen power supply control terminal (with power cord plug)
- Compressor temperature switch
- Upper and lower temperature limit alarms (built inside temperature controller)
- Burn-out circuit (built inside temperature controller)
- Watchdog timer (built inside temperature controller)
- Refrigerator automatic delay circuit (built inside temperature controller)
- Overheat protector (independent type)

## SPECIFICATIONS

Model	MC-711	MC-811
Power Supply	200V AC, 3 220V AC, 3 380V AC, 3	3W, 50/60Hz 3W, 60Hz 4W, 50Hz
Maximum Current	12A (8.3A at 380V AC)	14A (9.2A at 380V AC)
Temperature Control System	Balanced Temperature Control system (BTC system)	
Operating Temperature	0 to +40 ( +32 to +104° F)	
Performance *1	Temperature Range	- 75 to +100 ( - 103 to +212° F)
	Temperature Fluctuation	±0.5 ( ±0.9° F)
	Temperature Uniformity	±1.0 ( ±1.8° F)
	Temperature Heat-up Rate	+ 20 to +100 ( + 68 to +212° F) Approx. 20 min.
	Temperature Pull-Down Rate	+ 20 to - 70 ( + 68 to - 94° F) Approx. 60 min.
Construction	Material	Exterior: Painted steel (Melamine baked finish) Interior: 18-8 Cr-Ni stainless steel plate (2B polish) Insulation: Rigid polyurethane foam, glass fiber reinforced plastics, others
	Heater	Nichrome-stripped wire heater 1kW
	Performance *1	Refrigeration system
Refrigerator		Hermetically sealed compressor (R404A/ R508A)
Refrigerator capacity		650W + 400W      800W + 650W
Expansion mechanism		Capillary tube system
Chamber Air Circulator	Plate-fin cooler	
Fittings	Viewing window ( 120mm with frost prevention heater), Cable port ( 50mm, 1pc), Integrating hour meter, Power cord, Drain tube	
Inside Dimensions	400W x 400H x 400D mm (15.7W x 15.7H x 15.7D in)	
Outside Dimensions *2	900W x 1200H x 610D mm (35.4W x 47.2H x 24.0D in)	
Inside Capacity	64L (2.2ft <sup>3</sup> )	
Weight	155kg (342 lbs)	

\*1 At +23 ( +73.4° F) ambient temperature, no specimen.

The performance is according to JTM K 01-1998 of Japan Testing Machinery Association.

\*2 Excluding protrusions.

## TEMPERATURE INDICATOR-CONTROLLER

Model	P-instrumentation (SCP-220)	T-instrumentation (ES-102)
Operating mode	Program/ Constant operation	Constant operation
Display	Color TFT LCD display	7-segment LED display
Setting	Analog touch panel method	Mechanical key input method
Program memory capacity	RAM pattern: 20 program patterns ( 99 steps per pattern) ROM pattern: 10 program patterns	————
Setting and indication range	Temp.	- 85 to +110 (MC-711), - 95 to +190 (MC-811)
	Time	0 to 999hrs. 59min.
Setting and indication resolution	Temp.	0.1
	Time	1 min.
Input	Thermocouple type T ( Copper/ Copper-Nickel)	
Communication function	RS-485	
Auxiliary functions	Input burn-out detection function, Upper and lower temp. limit alarm function, Self-diagnostic function, Alarm indication function, Power cut protection function, Refrigerator capacity automatic control function, Trend graph indication function (SCP-220), Help function (SCP-220)	

## ACCESSORIES

Shelf (stainless) .....	2
Shelf brackets (stainless) .....	2 sets
Cable port rubber plug ( 50mm) .....	1
Chamber lamp .....	1
Glass tube fuse .....	2 (200, 220 VAC), 1 (380 VAC)
Thermal fuse .....	1
Plug type fuse (for 380 VAC) .....	1
User's manual .....	1

## OPTIONS

Paperless recorder	Cable port
Temperature recorder	Cable port rubber plug
Temperature recorder for future installation	Shelf / Shelf bracket
Thermocouple	Caster
Emergency stop switch	Communication function (E-BUS/ GPIB/ RS-232C)
*except 380V AC spec.	Communication cable
External alarm terminal	Power cord 5• 10m
	*except 380V AC spec.



Do not use specimens which are explosive or inflammable, or which contain such substances. To do so could be hazardous, as this may lead to fire or explosion.

Do not place corrosive materials in the chamber. If corrosive substances or liquid is used, the life of the unit may be significantly shortened specifically because of the corrosion of stainless steel, resin and silicone materials.

Do not place life forms or substances that exceed allowable heat generation.



Be sure to read the instruction manual before operation.

Some photographs listed in this catalog contain Japanese display.

## エスペック株式会社 <http://www.espec.co.jp/>

本社 530-8550 大阪市北区天神橋 3-5-6  
Tel:06-6358-4741 Fax:06-6358-5500

東京支社 108-6012 東京都港区港南 2-15-1  
品川インターシティA棟12F  
Tel:03-5783-8731 Fax:03-5783-8737

仙台 Tel:022-218-1891 Fax:022-218-1894  
つくば Tel:029-854-7805 Fax:029-854-7785  
さいたま Tel:048-643-1918 Fax:048-645-1597  
東京 Tel:03-5783-8732 Fax:03-5783-8737  
西東京 Tel:042-501-2571 Fax:042-501-2573  
横浜 Tel:03-5783-8767 Fax:03-5783-8738  
松本 Tel:0263-48-0401 Fax:0263-48-0410  
静岡 Tel:054-237-8000 Fax:054-238-3441  
金沢 Tel:076-268-1891 Fax:076-268-1893  
名古屋 Tel:052-777-2551 Fax:052-777-2575  
滋賀 Tel:0748-72-5077 Fax:0748-72-5070  
京都 Tel:075-315-1232 Fax:075-311-6305  
大阪 Tel:06-6358-4746 Fax:06-6358-5176  
広島 Tel:082-830-5211 Fax:082-876-5050  
福岡 Tel:092-471-0932 Fax:092-474-3500  
カスタマーセンター ☎ 0120-701-678 Fax:06-6358-4464

## エスペック エンジニアリング 株式会社

本社 572-0072 寝屋川市太間東町15-8  
Tel:072-834-1191 Fax:072-834-7755

仙台 Tel:022-218-1891 Fax:022-218-1894  
宇都宮 Tel:028-667-8734 Fax:028-667-5803  
つくば Tel:029-854-7805 Fax:029-854-7785  
高崎 Tel:027-320-8571 Fax:027-320-8573  
さいたま Tel:048-643-1918 Fax:048-640-5807  
千葉 Tel:043-286-6020 Fax:043-286-6022  
東京 Tel:03-3752-8601 Fax:03-3752-8625  
西東京 Tel:042-501-2571 Fax:042-501-2573  
横浜 Tel:045-847-2696 Fax:045-847-2619  
厚木 Tel:0463-94-9433 Fax:0463-94-6542  
松本 Tel:0263-48-0401 Fax:0263-48-0410  
静岡 Tel:054-237-8000 Fax:054-238-3441  
金沢 Tel:076-268-1891 Fax:076-268-1893  
名古屋 Tel:052-777-2551 Fax:052-777-3663  
津 Tel:059-233-5400 Fax:059-233-5411  
滋賀 Tel:0748-72-8077 Fax:0748-72-5070  
京都 Tel:075-311-8081 Fax:075-311-6305  
大阪 Tel:072-834-1191 Fax:072-834-7755  
兵庫 Tel:078-938-1913 Fax:078-938-1914  
広島 Tel:082-830-5211 Fax:082-876-5050  
新居浜 Tel:0897-31-3160 Fax:0897-36-3180  
福岡 Tel:092-471-0932 Fax:092-474-3500  
BANGKOK Tel:66-2-433-8331 Fax:66-2-433-1679

### 海外関連会社

#### ESPEC NORTH AMERICA, INC.

Tel:1-616-896-6100 Fax:1-616-896-6150

#### ESPEC EVALUATION & TEST SYSTEMS, INC.

Tel:1-408-592-4059 Fax:1-408-778-4353

#### ESPEC EUROPE GmbH

Tel:49-89-18939630 Fax:49-89-189396379

#### ESPEC ENVIRONMENTAL EQUIPMENT (SHANGHAI) CO., LTD.

##### Head Office

Tel:86-21-51036677 Fax:86-21-63372237

##### BEIJING Rep. Office

Tel:86-10-64627025 Fax:86-10-64627036

##### GUANGZHOU Rep. Office

Tel:86-20-83317826 Fax:86-20-83317825

##### SHENZHEN Rep. Office

Tel:86-755-83674422 Fax:86-755-83674228

##### SUZHOU Rep. Office

Tel:86-512-68664007 Fax:86-512-68601994

##### WUXI Rep. Office

Tel:86-510-82735036 Fax:86-510-82735039

#### ESPEC TEST TECHNOLOGY (SHANGHAI) CO., LTD.

Tel:86-21-68798008 Fax:86-21-68798008

#### ESPEC (MALAYSIA) SDN. BHD.

Tel:60-3-89451377 Fax:60-3-89451287



### ISO 9001( JIS Q 9001 )審査登録

エスペックは(財)日本規格協会(JSA)より国際規格ISO 9001:2000( JIS Q 9001:2000 )に基づく品質システムに審査登録しています。

### ISO 14001( JIS Q 14001 )審査登録

エスペックグループ エスペック株式会社  
エスペックエンジニアリング株式会社  
エスペックテストセンター株式会社

製品の改良・改善のため、仕様および外觀、その他を予告なく変更することがあります。あらかじめご了承ください。  
本カタログに記載されている会社名および商品名は各社の商標または登録商標です。  
本カタログはリサイクル紙を使用しています。